



# SmartVu 1.3 Megapixel Mini Vandal Dome

Part of Dedicated Micros HD IP video surveillance cameras, the updated SmartVu 2015 range features the vandal dome with 1/3" Aptina 1.3MP CMOS sensor and 6m IR distance.

Ideal for designing a cost effective HD solution combined with ease of install when coupled with any NetVu connected product, the SmartVu cameras are perfectly complimented by DM's latest, enhanced SD Advanced DVR/NVR portfolio. When configured with the SD Advanced NVR the SmartVu series contains a powerful suite of enterprise-scale capabilities protected by DM's award winning Closed IPTV.

DM's SmartVu IP cameras are remote codec capable when utilised with a NetVu connected server allowing the image coding to be done directly at the camera head, allowing a greater number of cameras to be connect and managed from one unit.



## Features & Benefits

**1280x720p HD Resolution**

**3.6mm Fixed IR Coated Lens**

**6m IR Distance**

**MPEG4 / JPEG / H.264 Compression**

**Closed IPTV – Via Switch**

**MultiMode – Save Up To 50% On Recording**

**Power Over Ethernet**

**Alarm Handling (With SD Advanced DVR/NVR)**

**IK10 Vandal Resistant**

**IP66 Rated**

**Up To 10 Streams Generated**

**Video Motion Detection (VMD)**

## Ordering Information

Part Number	Description
SV-MD/720/3M6/I	SmartVu 720 Mini Vandal Dome (with IR)

## Dedicated Micros Technology Benefits

### **NetVu Remote Codec**

When utilised with a NetVu connected server each camera can work as a remote codec. This is the most efficient means of connection to a DM Closed IPTV server as rather than simply request a stream from the IP camera, and then recode the stream as necessary the remote codec format makes individual requests for streams of frames directly from the codec in the camera.

Using this process the camera becomes an integral extension to the DVR/NVR distributing the processing requirements allowing a greater number of cameras to be connected and managed from one unit as stream communication becomes more efficient, reducing potential bottlenecks.

### **Ease Of Installation**

Dedicated Micros technology removes the need for prior IT networking knowledge facilitating ease of install while ensuring the highest quality IP solution.

Port specific auto detect and auto configure cameras using Closed IPTV

A shared user interface helps minimise operator training whilst powerful features such as direct configuration of PTZ cameras and domes from connected DVR/NVRs helps reduce installation time providing benefits to both end user and installer/integrator.

### **Customisable**

PowerScripting enables user customisation of complex, logical, alarm handling routines and integration of data from external sources. Extra value is created for the user through integration with business processes e.g. access control, building management, process control and manpower management. The result is a measurable return on investment tied in with operational process such as retail loss prevention.

### **MultiMode Recording And Streaming**


Allows an event trigger from VMD, analytics and alarms to affect an instantaneous change in bit rate, frame rate and resolution. Full HD streams are generated when needed, e.g. for identification purposes, otherwise a standard definition stream saves up to 50% of the user's storage capacity.

### **Closed IPTV**

All DM products are underpinned by the Closed IPTV technology. This encompasses a number of features to ensure security is at the forefront of the solution.

- Trusted Endpoints (a unique secret signature that is shared with the switch and the NVR) ensure any attempt to interfere with the Closed IPTV network will trigger an immediate security alert.
- Removing access to the corporate network via an exposed endpoint (e.g. a camera)
- Restrict Multicast – No one network endpoint can gain access to video from any other cameras or endpoints on the network.
- Firewall settings – Prevents any endpoint from opening a connection to a TCP server on the network

## Technical Drawing

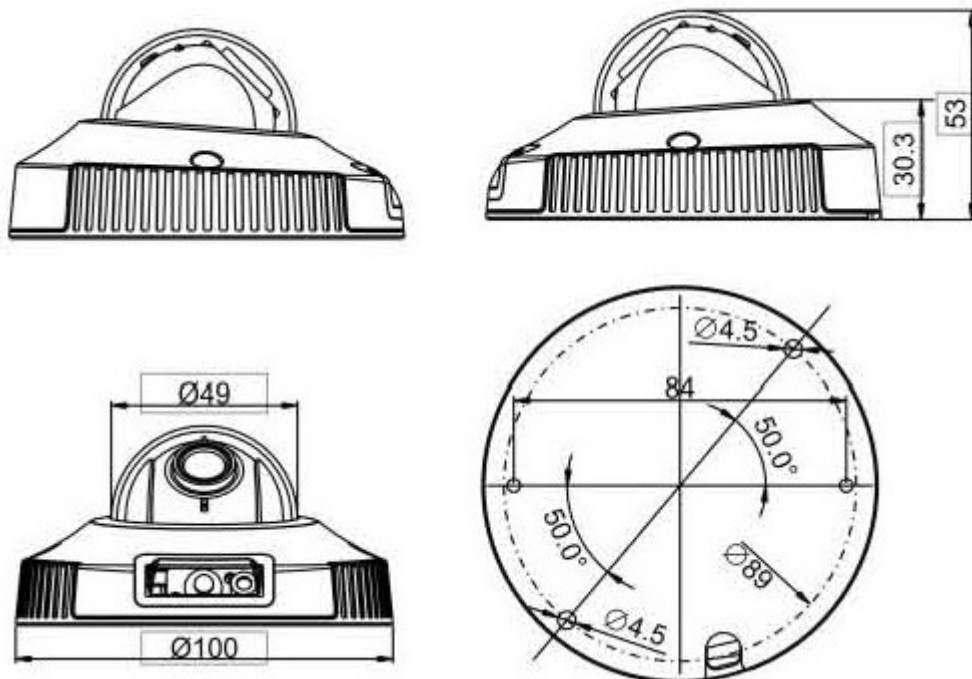

## Technical Specification

Camera Specification	
Image Sensor	1/3" 1.3 MP HD Progressive Scanning CMOS
Effective Pixels	1280x720p
AGC	Auto / Manual
Day/Night control	Auto
Aspect Ratio	16:9
Day / Night	True Day / Night With ICR Filter
S/N Ratio	>50dB
Light Sensitivity	0.1 Lux @ F1.2 ( Colour ), (0 lux with IR) IR LEDs
Compression	MPEG4, JPEG, H.264 (Up To 10 Different Streaming Profiles)
IR Distance	6m
Interface	One 10M/100M Self-Adaption Ethernet Port, RJ-45
Shutter	Auto/user 1/5 – 1/50,000 ; 50/60Hz software selectable
Lens	
Focal Length	3.6mm
Lens	3.6mm Fixed IR Coated
Image Format	1/3"
Focus	N/A
Zoom	4x Optical Zoom
General Specifications	
Audio	N/A
Power	12V DC Terminal Input / PoE Class 3 8W
Electronic Shutter	Auto / User 1/5 - 1/50,000 ; 50/60Hz Software Selectable
Gain Control	Auto / Fixed 8~102dB
Light Compensation	BLC /HLC
Network Protocols:	HTTP, TCP/IP, UDP/IP, RTSP, FTP, PoE, NTP. Unicast And Multicast Supported.
Operating Temperature	Operating: -20°C To 60°C / Storage: -20°C To 60°C
Operating Humidity	10~85%RH
Approvals	CE / FCC / RoHS Compliant / IP66 / IK10
Product Dimensions	100x53mm
Product Weight	0.85KG
Warranty	1 year plus additional free 1 year when product registered



v1.1 18.07.17 © Copyright NetVu Ltd

Design and specifications are subject to change without notice E&O.E